

RF Event indicator



**Transparent
3D view**



**Transparent
Side view**




**Solid
Front view**



**Solid
Side view**

- Integrate the monitoring of movement in the strata directly with the cable anchor support.
- Radio Frequency (RF) signal.
- Monitoring device will indicate movement with LED light strip 360°.
- Battery life in the instrument is minimum 1 year.
- Monitoring device is blast resistant.

Electro micrometer

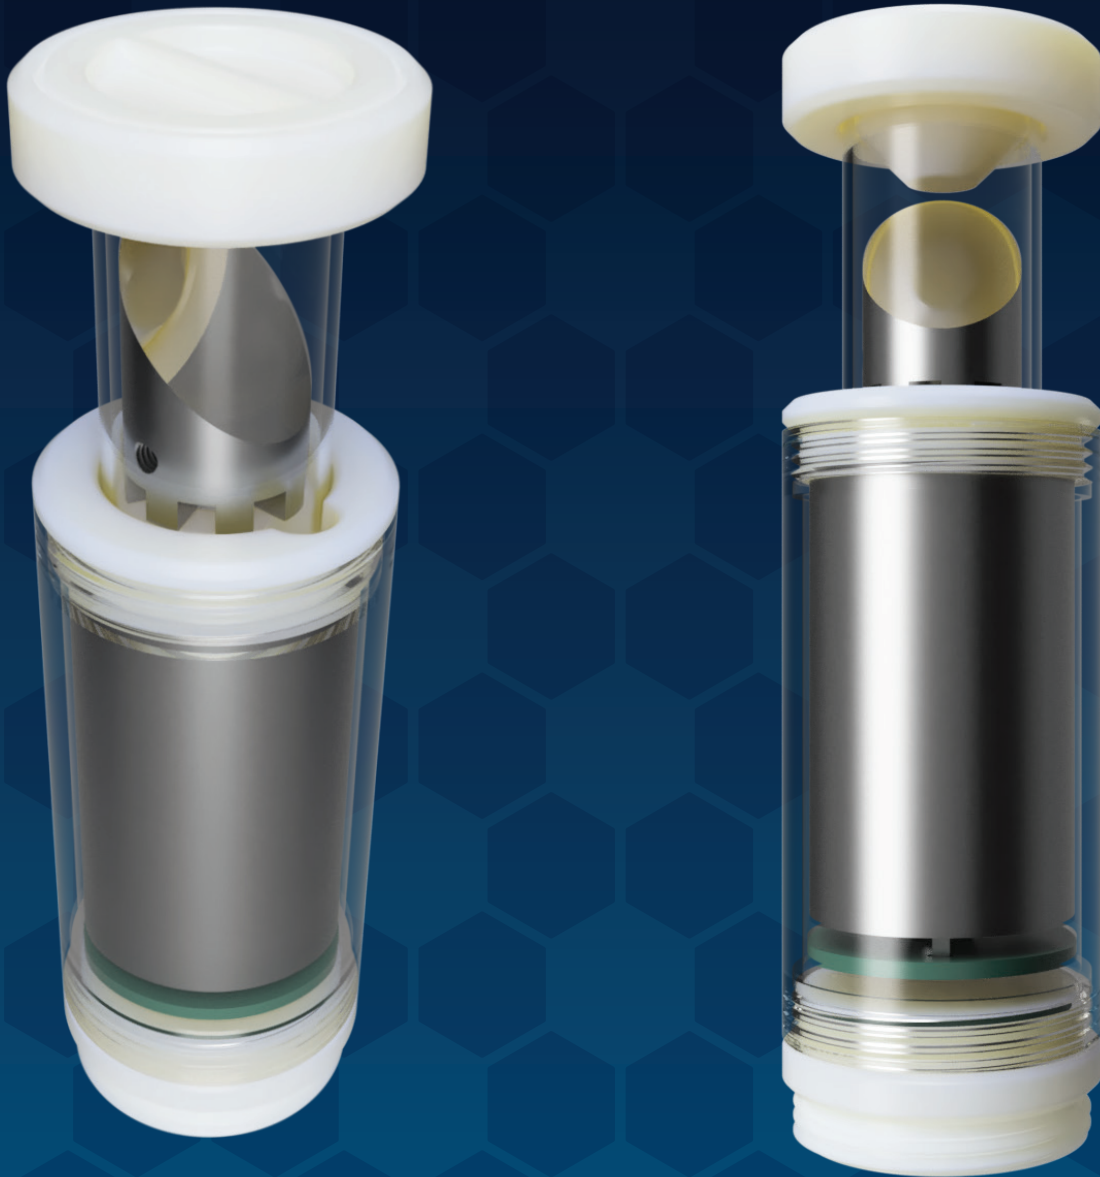

- ⬡ Measure a profile of the drilled hole.
- ⬡ Electronic readings to be used in the drawing of the profile of the drilled hole.
- ⬡ LCD screen display of the measurements and data captured.

SAFE LIGHT

LIGHT THE WAY

Intrinsic safe light for 8 hours at 50 lux.



WE SUPPORT YOUR MINE

Contact **Christiaan**

082 898 9834 | 011 953 4137/8

christiaan@mjmiming.co.za

www.mjmining.co.za

22 Pulley Street | Krugersdorp West

